




PLANT: 3565 N HAZEL FRESNO, CA 93722  
 MAIL: 4460 W. SHAW # 262 FRESNO, CA 93722  
 TEL 559 441-7703 FAX 559 441-7741  
 E-MAIL: gregorboat @ cs.com  
 WEBSITE: gregorboats.com

## THE Angler 16



The Angler is one of our most popular tiller steered. Wider and deeper than even our CXW Series, The Angler offers the seaworthiness and ruggedness for which Gregor is known. Offering the same rugged construction as its bigger brother the Alaskan/Baja. And the ample storage including side trays as well as storage in the front and center seats as well as under the stern seats.

Efficiency? Gregor has no equal. You don't need large horsepower required of boats with less demanding design and production standards. Durability? Our engineered Longitudinal Stringer / Transverse Bulkhead System coupled with Injected Foam translate into superior structural integrity and durability, plus sound deadening for a quieter ride.

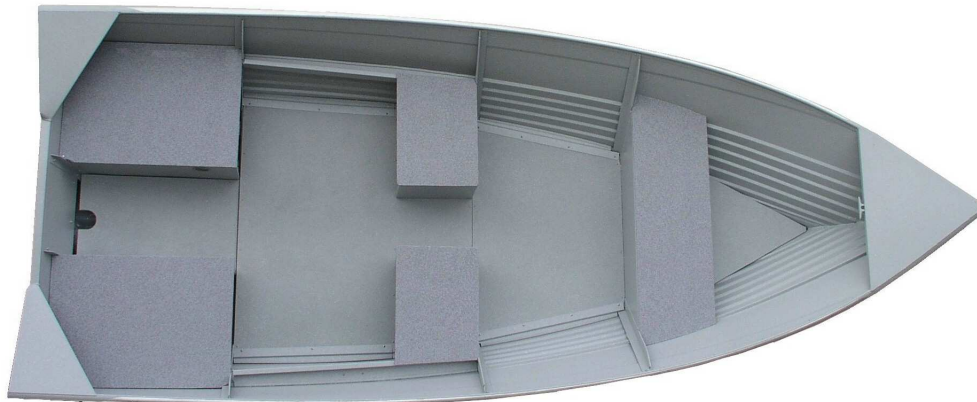

### **STANDARD FEATURES**

- ◆ Level Shear ◆ One Piece Bottom ◆ Unitized Construction ◆ 5052 & 6063 Marine Aluminum Alloy ◆ Heavy Duty Extruded Double-Wall Box Chine
- ◆ Enhanced Longitudinal/Transverse Bulkhead Integrated Structural System ◆ Full Length Continuously Welded Coaming ◆ Extra Large Bow Plate
- ◆ Bow Eye, Welded On ◆ Stern Eyes, Welded on ◆ Side Trays ◆ Self Bailing Motorwell ◆ Slip Resistant Non-Glare Paint ◆ Full Length Pressed-in Splash Rail
- ◆ Full Length Flat Floorboards ◆ Storage in Front & Center Seats ◆ Storage under Rear Seats

### **OPTIONAL FEATURES**

- ◆ Commercial Bow Rail ◆ Commercial Side Rails ◆ Live Well in Bow ◆ Aluminum Storage Boxes in lieu of Pedestals ◆ Bilge Pump ◆ Navigation Lights
- ◆ Bow Rails – Welded On ◆ Side Rails – Welded On ◆ Stern Down Rigger Brackets – Weld on ◆ Remote Steering ◆ Pre-rigged Engine Controls -25HP & up
- ◆ .125" Bottom ◆ Bow Casting Platform w/ Compartment & Fish Box

### **SPECIFICATIONS-**

LENGTH	BEAM	DEPTH			TRANS HT	HULL WT	HULL THICKNESS		BOTTOM WIDTH	DEADRISE		MAX CAP	
		BOW	AMID	STERN			BOTTOM	SIDES		TRANS	AMID	LBS	PER HP
16'	82"	31"	30"	26"	20"	390 lb	.080	(.125 opt)	.080	62"	12 deg	15 deg	1125 5 40

SPECIFICATIONS AND FEATURES SUBJECT TO CHANGE WITH OUT NOTICE.



**Optional Cast Platform**

